



# EXCERPT FROM THE PROCEEDINGS

---

## OF THE SIXTH ANNUAL ACQUISITION RESEARCH SYMPOSIUM

### USING A SYSTEM MATURITY SCALE TO MONITOR AND EVALUATE THE DEVELOPMENT OF SYSTEMS

**Published: 22 April 2009**

**by**

**Romulo B. Magnaye, Brian J. Sauser and Jose E. Ramirez-Marquez**

**6<sup>th</sup> Annual Acquisition Research Symposium  
of the Naval Postgraduate School:**

**Volume I:  
Defense Acquisition in Transition**

**May 13-14, 2009**

Approved for public release, distribution is unlimited.

Prepared for: Naval Postgraduate School, Monterey, California 93943



ACQUISITION RESEARCH PROGRAM  
GRADUATE SCHOOL OF BUSINESS & PUBLIC POLICY  
NAVAL POSTGRADUATE SCHOOL

Report Documentation Page				Form Approved OMB No. 0704-0188	
Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.					
1. REPORT DATE <b>APR 2009</b>		2. REPORT TYPE		3. DATES COVERED <b>00-00-2009 to 00-00-2009</b>	
4. TITLE AND SUBTITLE <b>Using a System Maturity Scale to Monitor and Evaluate the Development of Systems</b>				5a. CONTRACT NUMBER	
				5b. GRANT NUMBER	
				5c. PROGRAM ELEMENT NUMBER	
6. AUTHOR(S)				5d. PROJECT NUMBER	
				5e. TASK NUMBER	
				5f. WORK UNIT NUMBER	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) <b>Stevens Institute of Technology,School of Systems and Enterprises,One Castle Point on Hudson,Hoboken,NJ,07030</b>				8. PERFORMING ORGANIZATION REPORT NUMBER	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)				10. SPONSOR/MONITOR'S ACRONYM(S)	
				11. SPONSOR/MONITOR'S REPORT NUMBER(S)	
12. DISTRIBUTION/AVAILABILITY STATEMENT <b>Approved for public release; distribution unlimited</b>					
13. SUPPLEMENTARY NOTES					
14. ABSTRACT <b>The readiness of a system under development cannot be adequately measured by using traditional project management tools that focus predominantly on cost and schedule. An alternative principally utilized by NASA, the DoD and the DoE to address this has been the prescriptive metric known as Technology Readiness Level (TRL). However, TRL is only meant to measure the readiness of technology elements and does not address their integration or some other challenges of systems development. To address integration, the Systems Development &amp; Maturity Laboratory (SD&amp;ML) at Stevens Institute of Technology introduced another prescriptive metric called Integration Readiness Level (IRL). Combining TRL and IRL scales, SD&amp;ML has formulated a System Readiness Level (SRL). SRL is an aggregate measure that characterizes the progress that has been accomplished by a system under development based on the observable readiness characteristics of the technology and integration elements, not the cost and schedule values. This paper describes the application of SRL to a constrained resource optimization model to determine an optimal development plan that identifies which technologies and integration elements should be matured to which levels such that a specific level of system readiness is achieved by a certain time. This optimal plan can be used to monitor and evaluate the actual progress of the system?it can be the basis of a systems lifecycle maturity management approach called System Earned Readiness Management (SERM). A simple example is used to illustrate SERM.</b>					
15. SUBJECT TERMS					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT <b>Same as Report (SAR)</b>	18. NUMBER OF PAGES <b>49</b>	19a. NAME OF RESPONSIBLE PERSON
a. REPORT <b>unclassified</b>	b. ABSTRACT <b>unclassified</b>	c. THIS PAGE <b>unclassified</b>			

The research presented at the symposium was supported by the Acquisition Chair of the Graduate School of Business & Public Policy at the Naval Postgraduate School.

**To request Defense Acquisition Research or to become a research sponsor, please contact:**

NPS Acquisition Research Program  
Attn: James B. Greene, RADM, USN, (Ret)  
Acquisition Chair  
Graduate School of Business and Public Policy  
Naval Postgraduate School  
555 Dyer Road, Room 332  
Monterey, CA 93943-5103  
Tel: (831) 656-2092  
Fax: (831) 656-2253  
E-mail: [jbgreene@nps.edu](mailto:jbgreene@nps.edu)

Copies of the Acquisition Sponsored Research Reports may be printed from our website [www.acquisitionresearch.org](http://www.acquisitionresearch.org)

Conference Website:  
[www.researchsymposium.org](http://www.researchsymposium.org)



ACQUISITION RESEARCH PROGRAM  
GRADUATE SCHOOL OF BUSINESS & PUBLIC POLICY  
NAVAL POSTGRADUATE SCHOOL

## Proceedings of the Annual Acquisition Research Program

The following article is taken as an excerpt from the proceedings of the annual Acquisition Research Program. This annual event showcases the research projects funded through the Acquisition Research Program at the Graduate School of Business and Public Policy at the Naval Postgraduate School. Featuring keynote speakers, plenary panels, multiple panel sessions, a student research poster show and social events, the Annual Acquisition Research Symposium offers a candid environment where high-ranking Department of Defense (DoD) officials, industry officials, accomplished faculty and military students are encouraged to collaborate on finding applicable solutions to the challenges facing acquisition policies and processes within the DoD today. By jointly and publicly questioning the norms of industry and academia, the resulting research benefits from myriad perspectives and collaborations which can identify better solutions and practices in acquisition, contract, financial, logistics and program management.

For further information regarding the Acquisition Research Program, electronic copies of additional research, or to learn more about becoming a sponsor, please visit our program website at:

[www.acquistionresearch.org](http://www.acquistionresearch.org)

For further information on or to register for the next Acquisition Research Symposium during the third week of May, please visit our conference website at:

[www.researchsymposium.org](http://www.researchsymposium.org)



THIS PAGE INTENTIONALLY LEFT BLANK



# Using a System Maturity Scale to Monitor and Evaluate the Development of Systems

---

**Presenter: Romulo B. Magnaye** received his BS in Mining Engineering and MBA from the University of the Philippines and a postgraduate research Diploma in Mineral Technology from Camborne School of Mines in England. He is currently a Robert Crooks Stanley fellow pursuing his PhD in Engineering Management at Stevens Institute of Technology in the School of Systems and Enterprises.

Romulo B. Magnaye  
Stevens Institute of Technology  
School of Systems and Enterprises  
Systems Development & Maturity Laboratory  
One Castle Point on Hudson  
Hoboken, NJ 07030  
Fax: 201-216-5541  
E-mail: [rmagnaye@stevens.edu](mailto:rmagnaye@stevens.edu)

## Authors:

**Brian J. Sauser** received his BS in Agriculture Development from Texas A&M University, MS in Bioresource Engineering from Rutgers, The State University of New Jersey, and PhD in Technology Management from Stevens Institute of Technology. He is currently an Assistant Professor at Stevens Institute of Technology in the School of Systems and Enterprises.

Brian J. Sauser  
Stevens Institute of Technology  
School of Systems and Enterprises  
Systems Development & Maturity Laboratory  
One Castle Point on Hudson  
Hoboken, NJ 07030  
Tel: 201-216-8589  
Fax: 201-216-5541  
E-mail: [bsauser@stevens.edu](mailto:bsauser@stevens.edu)

**Jose E. Ramirez-Marquez** received his BS in Actuarial Science from Universidad Nacional Autónoma de México, MS in Statistics and MS and PhD in Industrial and Systems Engineering from Rutgers, The State University of New Jersey. He is currently an Assistant Professor at Stevens Institute of Technology in the School of Systems and Enterprises.

Jose E. Ramirez-Marquez  
Stevens Institute of Technology  
School of Systems and Enterprises  
Systems Development & Maturity Laboratory  
One Castle Point on Hudson  
Hoboken, NJ 07030  
Tel: 201-216-8003  
Fax: 201-216-5541  
E-mail: [jmarquez@stevens.edu](mailto:jmarquez@stevens.edu)

---

## Abstract

The readiness of a system under development cannot be adequately measured by using traditional project management tools that focus predominantly on cost and schedule. An



alternative principally utilized by NASA, the DoD and the DoE to address this has been the prescriptive metric known as Technology Readiness Level (TRL). However, TRL is only meant to measure the readiness of technology elements and does not address their integration or some other challenges of systems development.

To address integration, the Systems Development & Maturity Laboratory (SD&ML) at Stevens Institute of Technology introduced another prescriptive metric called Integration Readiness Level (IRL). Combining TRL and IRL scales, SD&ML has formulated a System Readiness Level (SRL). SRL is an aggregate measure that characterizes the progress that has been accomplished by a system under development based on the observable readiness characteristics of the technology and integration elements, not the cost and schedule values.

This paper describes the application of SRL to a constrained resource optimization model to determine an optimal development plan that identifies which technologies and integration elements should be matured to which levels such that a specific level of system readiness is achieved by a certain time. This optimal plan can be used to monitor and evaluate the actual progress of the system—it can be the basis of a systems lifecycle maturity management approach called System Earned Readiness Management (SERM). A simple example is used to illustrate SERM.

## 1. Introduction

“How much progress have I accomplished against my original plan?” Program managers ask this is the fundamental question in order to keep track of the development of their systems. To answer this, they have relied on assessment and evaluation tools. Abba (1997) describes the evolution of these techniques from the “Spend Plan” approach to Program Evaluation and Review Technique (PERT), which was then modified by the Navy into PERT COST in an attempt to improve cost management in 1960. Combining its own experiences with those of the Navy’s, the Air Force in 1963 formulated the earliest version of an Earned Value Management (EVM) approach by developing Cost/Schedule Planning and Specification (C/SPEC) to manage the Minuteman program. This initiative evolved into the 1967 Department of Defense (DoD) Instruction called Cost/Schedule Control Systems Criteria or C/SCSC (DoD, 1967). Initially developed by financial managers, C/SCSC was primarily concerned with cost and was generally ignored by project managers who were more concerned with technical and performance considerations (Abba, 1997). In 1989, the organization within the DoD tasked with C/SCSC was transferred from the Controller’s office to Acquisition. By 1995, EVM was designated as the preferred tool for managing risky, cost-based contracts (Kaminski, 1995). Along with these developments, the DoD also developed the pioneering EVM software *Performance Analyzer*. The DoD encouraged the private sector to enhance and eventually replace this software with tools that are commercially available today.

EVM as a primary tool has been credited with reducing total cost overrun on the largest, most risky DoD contracts to 5.5% by 1999, (Abba 2001). Currently, however, there is growing concern that EVM, which evaluates cost and schedule performances, does not adequately report the proper maturation of complex systems under development. In particular, while EVM is quite effective in capturing and representing the accomplishment of work packages, it is unable to state whether these completions are actually leading to the maturity of the system’s critical components. Thus, it is unable to estimate the maturity or readiness of the entire system at a given time during its development. This is especially true when there is a high degree of uncertainty due to the novelty and high technological content of the system. Such systems require numerous iterations before requirements and design can be frozen. Once they are, then



EVM becomes a most effective tool. However, until that point in a system's development is reached, a different kind of assessment method is needed.

This new assessment method will require the following elements: metrics that can measure maturity of technologies—their integration links and the system itself; the identification of optimal development plans (based on these metrics) that can meet the development strategy of the system; and a mechanism for reporting the periodic status of the system against the optimal development plan so variances can be measured, explained and corrective measures may be formulated.

To begin to address these elements of an alternative or modified EVM approach, we will describe the application of a system maturity metric (i.e., System Readiness Level) and its application to a constrained resource optimization model to determine an optimal development plan that identifies which technologies and integration elements should be matured to which levels, such that a specific level of readiness is achieved by a certain time. We will then use the optimal plan to demonstrate how this technology can be used to monitor and evaluate the actual progress of a system. Thus, it can become the basis of a system's lifecycle maturity management approach, which we have defined as System Earned Readiness Management (SERM). We conclude with a simple example to illustrate SERM.

## 2. System Readiness Metrics

In order to measure the maturity of a complex system, Sauser, Verma, Ramirez-Marquez, and Gove (2006) proposed the System Readiness Level scale or SRL. This was eventually refined into its latest form, which was presented to this Symposium last year (Sauser, Magnaye, Ramirez-Marquez & Tan, 2008b) and later published in length in the *International Journal of Defense Acquisition Management* (Sauser, Magnaye, Ramirez-Marquez & Tan, 2008a). It combines the widely accepted Technology Readiness Level (TRL) scale (Mankins, 1995; 2002; DoD, 2005), which is used to evaluate critical technology elements and an Integration Readiness Level (IRL) scale developed by Sauser et al. (2006) and refined by Gove (2007). TRL is presented in Table 1 while IRL is shown in Table 2 below.





**Table 1. Technology Readiness Levels**

TRL	Definition	Description (DoD, 2005)
	Actual System Proven Through Successful Mission Operations	Actual application of the technology in its final form and under mission conditions, such as those encountered in operational test and evaluation. In almost all cases, this is the end of the last "bug fixing" aspects of true system development. Examples include using the system under operational mission conditions.
8	Actual System Completed and Qualified Through Test and Demonstration	Technology has been proven to work in its final form and under expected conditions. In almost all cases, this TRL represents the end of true system development. Examples include developmental test and evaluation of the system in its intended weapon system to determine if it meets design specifications.
7	System Prototype Demonstration in Operational Environment	Prototype near or at planned operational system. Represents a major step up from TRL 6, requiring the demonstration of an actual system prototype in an operational environment, such as in an aircraft, vehicle or space. Examples include testing the prototype in a test bed aircraft
6	System/Subsystem Model or Prototype Demonstration in Relevant Environment	Representative model or prototype system, which is well beyond the breadboard tested for TRL 5, is tested in a relevant environment. Represents a major step up in a technology's demonstrated readiness. Examples include testing a prototype in a high fidelity laboratory environment or in simulated operational environment.
5	Component and/or Breadboard Validation in Relevant Environment	Fidelity of breadboard technology increases significantly. The basic technological components are integrated with reasonably realistic supporting elements so that the technology can be tested in a simulated environment. Examples include "high fidelity" laboratory integration of components.
4	Component and/or Breadboard Validation in Laboratory Environment	Basic technological components are integrated to establish that the pieces will work together. This is relatively "low fidelity" compared to the eventual system. Examples include integration of "ad hoc" hardware in a laboratory.
3	Analytical and Experimental Critical Function and/or Characteristic Proof-of-Concept	Active research and development is initiated. This includes analytical studies and laboratory studies to physically validate analytical predictions of separate elements of the technology. Examples include components that are not yet integrated or representative.
2	Technology Concept and/or Application Formulated	Invention begins. Once basic principles are observed, practical applications can be invented. The application is speculative and there is no proof or detailed analysis to support the assumption. Examples are still limited to paper studies.
1	Basic Principles Observed and Reported	Lowest level of technology readiness. Scientific research begins to be translated into applied research and development. Examples might include paper studies of a technology's basic properties.

**Table 2. Integration Readiness Levels**  
(Gove, 2007)

IRL	Definition	Description
9	Integration is <b>Mission Proven</b> through successful mission operations.	IRL 9 represents the integrated technologies being used in the system environment successfully. In order for a technology to move to TRL 9 it must first be integrated into the system and then proven in the relevant environment, so attempting to move to IRL 9 also implies maturing the component technology to TRL 9.
8	Actual integration completed and <b>Mission Qualified</b> through test and demonstration, in the system environment.	IRL 8 represents not only the integration meeting requirements, but also a system-level demonstration in the relevant environment. This will reveal any unknown bugs/defects that could not be discovered until the interaction of the two integrating technologies was observed in the system environment.
7	The integration of technologies has been <b>Verified and Validated</b> with sufficient detail to be actionable.	IRL 7 represents a significant step beyond IRL 6; the integration has to work from a technical perspective, but also from a requirements perspective. IRL 7 represents the integration meeting requirements such as performance, throughput, and reliability.
6	The integrating technologies can <b>Accept, Translate, and Structure Information</b> for its intended application.	IRL 6 is the highest technical level to be achieved, it includes the ability to not only control integration, but to specify what information to exchange, unit labels to specify what the information is, and the ability to translate from a foreign data structure to a local one.
5	There is sufficient <b>Control</b> between technologies necessary to establish, manage, and terminate the integration.	IRL 5 simply denotes the ability of one or more of the integrating technologies to control the integration itself; this includes establishing, maintaining, and terminating.
4	There is sufficient detail in the <b>Quality and Assurance</b> of the integration between technologies.	Many technology integration failures never progress past IRL 3, due to the assumption that if two technologies can exchange information successfully, then they are fully integrated. IRL 4 goes beyond simple data exchange and requires that the data sent is the data received and there exists a mechanism for checking it.
3	There is <b>Compatibility</b> (i.e., common language) between technologies to orderly and efficiently integrate and interact.	IRL 3 represents the minimum required level to provide successful integration. This means that the two technologies are able to not only influence each other, but also communicate interpretable data. IRL 3 represents the first tangible step in the maturity process.
2	There is some level of specificity to characterize the <b>Interaction</b> (i.e., ability to influence) between technologies through their interface.	Once a medium has been defined, a “signaling” method must be selected such that two integrating technologies are able to influence each other over that medium. Since IRL 2 represents the ability of two technologies to influence each other over a given medium, this represents integration proof-of-concept.
1	An <b>Interface</b> between technologies has been identified with sufficient detail to allow characterization of the relationship.	This is the lowest level of integration readiness and describes the selection of a medium for integration.

The SRL scale is calculated by using a normalized matrix of pair-wise comparisons of TRLs and IRLs that reflects the actual architecture of the system. Briefly stated, the IRL matrix

is obtained as a symmetric square matrix (of size  $n \times n$ ) of all possible integrations between any two technologies in the system. For technology integration to itself, perfect integration is assumed ( $IRL = 9$ ) while an  $IRL$  of zero is used when there is no integration between two technologies. Likewise, the vector  $TRL$  defines the readiness level of each of the technologies in the system. In its current form, the  $SRL$  is calculated as

$$[SRL] = \begin{bmatrix} SRL_1 \\ SRL_2 \\ \dots \\ SRL_n \end{bmatrix} = \begin{bmatrix} IRL_{11}TRL_1 + IRL_{12}TRL_2 + \dots + IRL_{1n}TRL_n \\ IRL_{21}TRL_1 + IRL_{22}TRL_2 + \dots + IRL_{2n}TRL_n \\ \dots \\ IRL_{n1}TRL_1 + IRL_{n2}TRL_2 + \dots + IRL_{nn}TRL_n \end{bmatrix} \quad \text{where } IRL_{ij} = IRL_{ji}$$

and

$$SRL = \frac{\left( \frac{SRL_1}{n_1} + \frac{SRL_2}{n_2} + \dots + \frac{SRL_n}{n_n} \right)}{n}$$

where  $n_i$  is the number of integrations with technology  $i$  plus its integration to itself.

The resulting  $SRL$  metric can be used to determine the maturity of a system and its status within the developmental lifecycle. Table 3, for example, is a representation of how the  $SRL$  scale correlates to a systems engineering lifecycle. These notional values of the  $SRL$  scale shown in Table 3 are meant to be organization-generic examples of how the calculated  $SRL$  values can be set as a guide by a systems engineer or program manager. That is, in practice the systems engineer or program manager at the outset must determine what values of the  $SRL$  correlate to that point where one phase begins and where it ends for that particular system. A calibration of these relevant ranges for each phase of system development will have to be program-specific or, at best, pertinent only to a particular class of systems that share a large degree of similarity. Therefore, the  $SRL$  value of a system can only be compared to that of the same system or a very similar system.

**Table 3. System Readiness Levels**

<b>SRL</b>	<b>Name</b>	<b>Definitions</b>
0.90 to 1.00	<i>Operations &amp; Support</i>	Execute a support program that meets materiel readiness and operational support performance requirements and sustains the system in the most cost-effective manner over its total lifecycle.
0.80 to 0.89	<i>Production &amp; Deployment</i>	Achieve operational capability that satisfies mission needs.
0.60 to 0.79	<i>Engineering &amp; Manufacturing Development</i>	Develop system capability or (increments thereof); reduce integration and manufacturing risk; ensure operational supportability; minimize logistics footprint; implement human systems integration; design for production; ensure affordability and protection of critical program information; and demonstrate system integration, interoperability, safety and utility.
0.40 to 0.59	<i>Technology Development</i>	Reduce technology risks and determine and mature appropriate set of technologies to integrate into a full system and demonstrate CTEs on prototypes.
0.10 to 0.39	<i>Materiel Solution Analysis</i>	Assess potential materiel solution options

NOTE: These ranges have been derived conceptually and are undergoing field verification and validation under Naval Postgraduate School Contract # N00244-08-0005.

While the TRL has been widely accepted by many government and industry organizations, the IRL and SRL need continued verification and validation; efforts are currently under way. Early results indicate that SRL can institute a robust and repeatable method for assessment and reporting the status of a system's development. It enables program managers to evaluate system development in real time and take corrective actions. It can also be applied as a predictive tool for technology insertion (Michaud, Forbes, Sauser & Gentile, 2008). In order to firmly establish the validity of SRL, it must be applied to a sufficient number of real complex systems under development.

Nevertheless, a rudimentary SRL calculator has been developed by the Systems Development & Maturity Laboratory (SD&ML) at Stevens Institute of Technology (see <http://www.SystemReadinessLevel.com>; Tools) and is undergoing refinement. In addition, the SD&ML is in ongoing partnerships to develop tools for system maturity assessment that leverage their continued research in systems maturity.

### 3. Formulating Optimal Development Plans

System development is pursued based on two generic strategies: minimizing costs or being the first to market/deployment (Laugen, Acur, Boer & Fick, 2005). In order to meet these strategic imperatives, the program manager must have the capability to instruct the project managers about which technologies and integration links must be matured to sufficient levels and when. Leveraging the SRL method previously described, such a development plan can be formulated by relying on constrained optimization techniques. The methodology for cost minimization has been formulated by Magnaye, Sauser, and Ramirez-Marquez (2009) while the first to market/deployment was developed by Sauser and Ramirez-Marquez (2009). These are summarized below.

### 3.1. Cost-driven Strategy

The cost-driven strategy is becoming more common as political pressure (in government programs) and competitive intensity (in industry) becomes more pronounced in the current and future economic environment characterized by more constrained resources and more demanding customers. In this case, the development strategy is to optimize the allocation of limited resources while attaining a certain level of system maturity or readiness within a specified time. In order to execute the development required to reach a SRL value by a certain time, it is necessary to know how to reach this level at a minimum cost. To address these concerns, Magnaye et al., (2009) proposed an optimization model whose objective is to minimize development cost (a function of TRL and IRL development) under constraints associated with the required SRL value and schedule. This model recognizes that technologies compete for resources and that the optimal allocation of the least amount of resources to reach a certain SRL value is desirable. The general mathematical form of this model called SCOD<sub>min</sub> follows:

$$\text{Minimize: } \text{SCOD}(\text{TRL}, \text{IRL}) = \text{SCOD}_{\text{fixed}} + \text{SCOD}_{\text{variable}}(\text{TRL}, \text{IRL})$$

$$\text{Subject to: } \text{SRL}(\text{TRL}, \text{IRL}) \geq \lambda$$

$$R_1(\text{TRL}, \text{IRL}) \leq r_1$$

.

.

.

$$R_h(\text{TRL}, \text{IRL}) \leq r_h$$

In addition to the SRL and time or schedule constraints, other possible constraints could be technical performance parameters such as equivalent mass for space systems, peak load capacities for transportation and so on.

The matrices **IRL** and **TRL** in Model SCOD<sub>min</sub> contain the decision variables. Each variable is integer-valued and bounded by  $(\text{IRL}_i, 9)$  and  $(\text{TRL}_i, 9)$ , respectively. That is, the TRL/IRL for the  $i^{\text{th}}$  component cannot be below its current level or above perfect technology or integration development (IRL or TRL = 9).

To completely characterize the decision variables in Model SCOD<sub>min</sub>, it is necessary to introduce the following transformation:

$$y_i^k = \begin{cases} 1 & \text{If } \text{TRL}_i = k \\ 0 & \text{otherwise} \end{cases} \quad \text{and} \quad x_{ij}^k = \begin{cases} 1 & \text{If } \text{IRL}_{ij} = k \\ 0 & \text{otherwise} \end{cases} \quad \text{for } k=1, \dots, 9$$

Notice that based on these binary variables, each of the possible normalized TRL and IRL in the system can be obtained as  $\text{TRL}_i = \frac{\sum_{k=1}^9 k y_i^k}{9}$  and  $\text{IRL}_{ij} = \frac{\sum_{k=1}^9 k x_{ij}^k}{9}$ . Based on these binary variables SRL<sub>i</sub> is transformed to:

$$\begin{aligned}
SRL_i &= \frac{\left(\sum_{k=1}^9 kx_{i1}^k\right)\left(\sum_{k=1}^9 ky_1^k\right)}{81} + \frac{\left(\sum_{k=1}^9 kx_{i2}^k\right)\left(\sum_{k=1}^9 ky_2^k\right)}{81} + \dots + \frac{\left(\sum_{k=1}^9 kx_{ij}^k\right)\left(\sum_{k=1}^9 ky_j^k\right)}{81} + \dots + \frac{\left(\sum_{k=1}^9 kx_{in}^k\right)\left(\sum_{k=1}^9 ky_n^k\right)}{81} \\
&= \frac{\sum_{j=1}^n \left(\sum_{k=1}^9 kx_{ij}^k\right)\left(\sum_{k=1}^9 ky_j^k\right)}{81}
\end{aligned}$$


Based on the computation of the SRL with these decision variables, Model SCOD<sub>min</sub> belongs to the class of binary, integer-valued, non-linear problems. For a system with  $n$  technologies containing  $m$  ( $m \leq (n-1)n/2$ ) distinct integrations, and assuming all technologies and integrations are at their lowest levels, there are  $9^{n+m}$  potential solutions to Model SCOD<sub>min</sub>. Evaluating each possible solution is prohibitive, so to generate a more timely optimal solution, a meta-heuristic approach developed by Ramirez-Marquez and Rocco (2008) was applied to the system under development and is described below. This approach, called Probabilistic Solution Discovery Algorithm (PSDA) has the capability of producing quasi-optimal solutions in a relatively short period of time. However, it must be mentioned that the results cannot be proven as the optimal solution because by taking a probabilistic approach, the algorithm can only select subsets of the entire feasible set from which to find a solution. Every time the algorithm is run a different subset is selected. Nevertheless, prior tests have indicated that PSDA results tend to be better than results from alternative meta-heuristic approaches (Ramirez-Marquez & Rocco, 2007).

As used in the solution of the minimization problem, the algorithm follows three inter-related steps:

- Strategy Development—a Monte Carlo simulation is used to identify the potential TRL or IRL levels the technologies and links can advance or mature;
- Analysis—each potential solution is analyzed by calculating its associated cost, schedule and SRL;
- Selection—through an evolutionary optimization technique, a new optimal set of technologies and integration links (with their corresponding TRLs and IRLs are chosen based on the cost, schedule and SRL values).

### 3.2. Notional Example and Results

Figure 1. System Concept Diagram

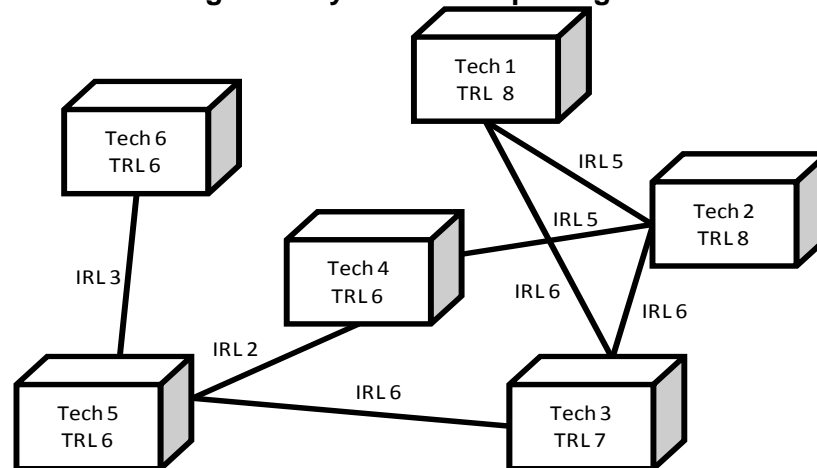

Tech 1: Remote Manipulator System (RMS); Tech 2: Special Purpose Dexterous Manipulator (SPDM); Tech 3: Electronic Control Unit (ECU); Tech 4: Autonomous Grappling (AG); Tech 5: Autonomous Proximity Operations (APO); and Tech 6: Laser Image Detection and Radar (LIDAR).

The following notional example will use a simple system of six technologies and seven integrations (see Figure 1 above) to demonstrate the steps involved in calculating the SRL value and minimizing the cost subject to constraints on system maturity and schedule. By evaluating the SRL of this system, an estimate of its actual readiness can be obtained before being deployed. In year 1 (current year), when reviewing the SRL for this system in its current state, the calculations yielded an SRL of 0.48. Referring to Table 3, this value indicates that this system should be in the Technology Development phase, with the technologies close to maturity (lowest TRL is 6) while integration elements are behind, one as low as level 2 only. For the system used in this example, Tables 4 and 5 present the *incremental* budgetary and time requirements to mature each technology and integration element from its current level to the next. For example, to mature Technology 1 from its current TRL of 8 to 9 will require another \$900,000 and 349 labor-hours. In order to fully mature all the technologies and integration elements, an additional \$26.574 million and 19,122 labor-hours are required.

**Table 4. Estimated *Incremental Cost* (x1000) and Time for Each Technology Effort**

Technology	1		2		3		4		5		6	
TRL Level	Cost	Time	Cost	Time	Cost	Time	Cost	Time	Cost	Time	Cost	Time
1												
2												
3												
4												
5												
6												
7							\$876	127	\$467	280	\$780	450
8					\$689	476	\$421	341	\$531	236	\$123	21
9	\$900	349	\$765	432	\$734	299	\$853	568	\$189	48	\$389	300

**Table 5. Estimated *Incremental Cost* (x1000) and Time for Each Integration Effort**

Integration	1,2		1,3		2,3		2,4		3,5		4,5		5,6	
IRL Level	Cost	Time	Cost	Time	Cost	Time	Cost	Time	Cost	Time	Cost	Time	Cost	Time
1														
2														
3											\$453	200	\$123	80
4											\$581	400	\$219	380
5											\$721	658	\$595	532
6	\$100	140					\$275	164			\$900	700	\$700	621
7	\$175	180	\$200	93	\$50	25	\$540	320	\$345	324	\$1,200	954	\$808	862
8	\$400	300	\$400	165	\$450	320	\$632	432	\$457	400	\$1,432	1021	\$1,003	997
9	\$600	500	\$650	389	\$550	465	\$745	690	\$678	500	\$1,765	1238	\$1,110	1145

If, for example, management wants to increase maturity from the current value of 0.48 (Technology Development stage) to 0.69 (Engineering & Manufacturing Development stage), using a maximum of 40% of the remaining time (7,649 labor-hours), the PSDA cost minimization model calculated a minimum additional development cost of \$5.914 million and would require 3,797 labor-hours.

In addition, the development plan that can achieve this desired SRL value of 0.69 with the least cost will be attained if the subsystems that are based on each technology element reach the maturity levels listed in Table 6. The latter shows that of the six subsystems, two are ahead ( $SRL_{1,3}$ ), two are behind ( $SRL_{4,5}$ ) and two are close to the same level ( $SRL_{2,6}$ ) as the whole system. This insight can become useful when the maturity levels are associated with systems engineering activities. That is, the spectrum of  $SRL_i$ 's can indicate levels of variation in the systems engineering activities, which are needed to mature the entire system.



**Table 6. Subsystem and Composite SRLs**

SRL1	SRL2	SRL3	SRL4	SRL5	SRL6	$\Sigma$	Composite SRL = $\Sigma/6$
0.856	0.707	0.815	0.461	0.593	0.722	4.154	0.692

Table 7 summarizes the additional results for the targeted SRL values and Table 9 indicates the development plan for each improvement scenario.

**Table 7. Best Solutions for Desired SRL Values**

Year	SRL		Time (man-hrs)		Computed Minimum Cost (\$ x1000)
	Targeted	Computed	Targeted	Computed	
1	0.48	0.48	NA	NA	NA
2	0.58	0.587	3,824	1,654	2,203
3	0.69	0.692	7,649	3,797	5,914
4	0.79	0.794	11,473	7,667	11,065
5	0.89	0.896	15,298	11,309	16,888
6	1.00	1.00	19,122	19,122	26,574

**Table 8. Development Plan**

Year	Target SRL	TRL						IRL						
		1	2	3	4	5	6	1,2	1,3	2,3	2,4	3,5	4,5	5,6
6	1.000	9	9	9	9	9	9	9	9	9	9	9	9	9
5	0.89	9	9	9	8	9	9	9	9	9	8	8	5	7
4	0.79	8	9	9	6	9	9	9	9	9	5	8	4	6
3	0.69	8	8	9	6	9	9	8	8	7	5	7	2	4
2	0.58	8	8	8	6	7	6	7	7	7	5	6	2	4
1	0.48	8	8	7	6	6	6	5	6	6	5	6	2	2

It must be noted that the algorithm can only work if the management objectives are inherently feasible. If a prescribed objective is impossible to achieve—as when too little time or labor-hours are available—the algorithm will not produce a solution.

### 3.3 First-to-Market/Deployment Strategy

A very similar optimization procedure can be designed to determine how fast a system can reach a certain stage in the development lifecycle or how quickly it can be deployed. In this case, there may be a need to launch an experimental system in favor of maximum current and short-term effectiveness while disregarding long-term reliability. The objective may be to meet pressing needs in a war theater or commercial market as quickly as possible.

For example, there is currently a necessity to deliver Operationally Responsive Space (ORS) systems to meet shortfalls in tactical space capabilities (e.g., communications and

imagery) that the warfighter needs in Iraq and Afghanistan. These are being satisfied through the development of small experimental satellites called TacSats (average cost=\$87 million) as well as improvements in the capabilities of small launch vehicles (GAO, 2008). In the private sector, the first company to develop commercially viable autonomous-recharging powertrain battery systems will enjoy first-mover advantages in the defense and commercial motor vehicle industry. Such a company will be able to create and sustain barriers to entry through control of the technology (property rights), brand recognition and so on.

In such instances, the primary objective is to maximize the readiness of the system utilizing a given amount of limited resources. Sauser and Ramirez-Marquez (2009) developed an SRL maximization model— $SRL_{max}$ —for such an application. As with the  $SCOD_{min}$  model, this model recognizes that the technologies as well as the integration elements that form the system compete for resources and that in order to reach the highest level of readiness, a program manager must be able to allocate the limited resources optimally. Just as what had to be done in the  $SCOD_{min}$  model, the program manager must be able to decide which technologies and integrations can be advanced to which levels of readiness at a certain point in time in order to reach the highest level of readiness for the system. The general mathematical form of  $SRL_{max}$  follows:

Maximize:  $SRL(TRL, IRL)$

Subject to:  $R_1(TRL, IRL) \leq r_1$

•  
•  
•

$R_h(TRL, IRL) \leq r_h$

As with the minimization model above,  $SRL_{max}$  belongs to the class of integer-valued, non-linear problems.

Using the same data for the notional example above, the maximization algorithm indicated that to get to the Engineering & Manufacturing Development phase of the lifecycle with an SRL value of 0.73, \$7.724 million and 5,081 labor-hours will be required. For comparison purposes, the optimal development plans to get to the Engineering & Manufacturing Development stage, albeit at different SRL values (0.69 for cost minimization and 0.73 for SRL maximization) are presented in Table 9 below.

**Table 9. Comparable Development Plans**

Model	SRL	TRL						IRL						
		1	2	3	4	5	6	1,2	1,3	2,3	2,4	3,5	4,5	5,6
SCOD <sub>min</sub>	0.69	8	<b>8</b>	9	6	9	9	8	8	<b>7</b>	<b>5</b>	7	<b>2</b>	<b>4</b>
SRL <sub>max</sub>	0.73	8	<b>9</b>	9	6	9	9	8	8	<b>8</b>	<b>5</b>	7	<b>2</b>	<b>5</b>

The cost minimization strategy will reach this stage by year 3. On the other hand, when the objective is to deploy as quickly as possible, the system can be in production as soon as the

prescribed resources are applied, provided the process and product technologies are amenable to accelerating the schedule. This assumes constant productivity that represents an ideal situation. In reality, there is more likely to be “process congestion,” which can lead to increased coordination and communication expenses, among other things. Therefore, for the maximization model, the estimated incremental costs for each TRL and IRL level must be adjusted upwards in order to reflect the cost implications of “crashing” the schedule. Depending upon these CTE- and integration link-specific cost increases, the formulated development plan is likely to be different from the one obtained from the minimization model.

The results must be carefully examined by the program manager and adjusted according to a proper understanding of the technologies involved and the context for the system. For example, in the previous illustration, some of the integration links have to be examined more closely and compared to a pre-determined minimum acceptable readiness values. If the minimum IRL values of, say, 5 are required in order to proceed to production within acceptable risk limits, then, additional resources must be allocated to mature integration links (4,5) and (5,6) to this level. This threshold IRL value may be higher for a cost minimization strategy (whereas long-term reliability is an important lifecycle variable) and lower for the first-to-deployment experimental strategy that characterizes the TacSats program in which long-term reliability is not quite as important as delivering the capability sooner rather than later.

It must also be noted that the solution is driven by the estimates of cost and labor inputs. The effectiveness of the optimization models are very dependent on the accuracy of the estimates of the resources required to proceed from one readiness level to the next. If these values are unrealistic, sub-optimal solutions will be generated.

Furthermore, given the high levels of uncertainty associated with complex systems that are under development, estimates of costs which are farther into the future may be less reliable than those which are closer to the current period. Thus, estimates have to be continually refined and reapplied to the optimization algorithm in order to fine-tune the development plan accordingly.

## 4. Monitoring Progress

The metrics that measure readiness together with the development plans generated by the appropriate optimization model serve as the foundation for a mechanism that can measure and communicate accomplishments during the development of complex systems. As a general principle, EVM may be retained as the preferred tool for project managers tasked with developing each of the critical technology and integration elements. To consider all the projects that an enterprise has to manage, Project Portfolio Management (PPM) has been suggested by De Reyck et al. (2005) and Martinsuo and Lehtonen (2007). In between, to manage the development of a system, which is a set of projects that are related because they share a common objective or client—a program management tool is required. Developing such a tool, which we refer to as System Earned Readiness Management (SERM), is one of the activities we intend to pursue next. SERM is intended to be very similar to EVM. It must answer the following questions:

- What amount of readiness is expected from the tasks planned?
- What level of readiness was accomplished by the tasks completed?
- How many resources did the accomplished level of readiness cost?



- How many resources were allocated to reach this level of readiness?
- What was the total budgeted resources to fully mature the system?
- What are now the expected total resources required to develop the system?

#### **4.1 Work Breakdown Structure for SERM**

SERM will require a breakdown of the tasks necessary to define the system, develop the critical technology elements and integrate them into the desired system. The tasks could be oriented towards the phases of the system lifecycle at the highest levels (i.e., Materiel Solution Analysis, Technology Development, Engineering & Manufacturing Development, Production & Deployment, and Operations/Support) and continue to be disaggregated into the TRL and IRL levels that have to be attained and, if necessary, down to the jobs that must be completed to reach the desired readiness for each time period. An abbreviated example is shown in Table 10 below.

**Table 10. WBS for SERM**

1. SYSTEM A 1.1 Materiel Solution Analysis Phase 1.1.1 Materiel Solution Analysis Decision Review 1.1.1.1 Joint Requirements Oversight Council (JROC) recommendations 1.1.1.2 Initial Capabilities Document(ICD) 1.1.1.2.1 Preliminary concept of operations 1.1.1.2.2 Description of needed capability 1.1.1.3 Analysis of Alternatives (AoA) 1.1.1.3.1 Determine acquisition phase of entry 1.1.1.3.2 Identify the initial review milestone 1.1.1.3.3 Designate the lead DoD Component(s) 1.1.1.3.4 Prepare Acquisition Decision Memorandum 1.1.2 Satisfy phase-specific entrance criteria for initial review milestone 1.1.2.1 Proposed materiel solution 1.1.2.2 Secure full funding for Technology Development Phase
1.2. Technology Development Phase 1.2.1 Management 1.2.1.1 Materiel solution 1.2.2 Technology/system development strategy 1.2.3 Acquisition decision memorandum 1.2.2 CTE 1 1.2.2.1 TRL =3 1.2.2.2 TRL =4 1.2.2.3 TRL =5 1.2.3 CTE 2 1.2.3.1 TRL =3 1.2.3.2 TRL =4 1.2.3.3 TRL =5 1.2.3.4 TRL =6 1.2.x CTE n.....etc.
1.3. Engineering & Manufacturing Phase 1.3.1 Management 1.3.1.1 Key performance parameters ... etc. 1.3.2 CTE 1 1.3.2.1 TRL = 6 ... etc
1.4. Production & Deployment Phase
1.5. Operations & Support Phase

#### 4.2 Determining Earned Readiness and Baseline

A readiness-oriented baseline should reflect the cumulative increase in the readiness of the technology and integration elements of the system. Readiness is allocated throughout the system by assigning the TRL and IRL values to the tasks completed *if and only if* they satisfy the definition for that readiness level. Thus, it is possible that under SERM, a planned task may be completed during the specified time frame but if it fails to advance the maturity of that particular technology or integration link, that completed task did not earn any readiness



values. By doing this, a program manager can clearly see which activities have failed, in order to identify the sources of cost overruns and find and communicate explanations for exceeding the budget.

This scenario is not unlikely given the high amount of uncertainty involved with developing complex systems. This uncertainty—the result of novelty, high technological content and very long development lifecycles—can lead to late identification of requirements and design flaws, requirements churn (due to inaccurate statements of user needs), delays in integration and testing and the need for significant unplanned work—rework as well as revisions in the system architecture and technology choices (Brownsword & Smith, 2005).

## 5. Conclusion

This paper suggested the development of a new program assessment and evaluation system that relies on the readiness measurement of a system's critical technology elements (using TRL) and the integrations that link them to each other (using IRL), which are then combined to estimate a System Readiness Level (SRL) in order to determine the readiness of the system as a whole. SRL can then be combined with the prescribed strategy for developing the system (either minimize costs or be the first to deploy the system) and used in an appropriate constrained optimization model to formulate the optimal development plan. Based on this plan, the progress of the system development effort can be monitored and evaluated using System Earned Readiness Management (SERM).

Of the various concepts enumerated here, only TRL has been accepted as a generally valid principle. IRL, SRL and SERM are all new, and thus require substantial efforts to verify and validate. It is necessary to apply them to a sufficient number of programs that have recently been completed or are currently being implemented. It must be noted that EVM for project management became more widely accepted only when the graduate students in the DoD's academic institutions were able to apply it to defense acquisition projects and show its benefits (Abba, 2001). The early anecdotal evidence from the few attempts to apply SRL has been positive and may justify a similar approach to verify and validate it.

## Acknowledgements

The authors would like to thank the support of the Naval Postgraduate School Contract # N00244-08-0005, the US Army Armament Research Development and Engineering Center, and Northrop Grumman Integrated Systems for their support in this research.

## List of References

- Abba, W.F. (1997, January-February). Earned value management—Reconciling government and commercial practices. *Program Manager*, (Special Issue), 58-63.
- Abba, W.F. (2001). How earned value got to prime time: A short look back and glance ahead. *The Measurable News*.
- Brownsword, L., & Smith, J. (2005, June). *Using earned value management (EVM) in spiral development* (CMU/SEI-2005-TN-016 Technical Note). Pittsburgh, PA: Carnegie Mellon University.
- DoD. (1967). *DoDI 7000.2 Performance measurement for selected acquisitions*. Washington, DC: Author.
- DoD. (2005). *Technology readiness assessment (TRA) deskbook*. Washington, DC: DoD—Science and Technology.



- GAO. (2008, April). *Space acquisitions: DoD is making progress to rapidly deliver low cost space capabilities but challenges remain*. Washington, DC: Author.
- Gove, R. (2007). *Development of an integration ontology for systems operational effectiveness* (Master's Thesis). Hoboken, NJ: Stevens Institute of Technology.
- Kaminski, P.G. (1995, October 23). Keynote address to the International Cost Schedule Performance Management Conference, Tyson's Corner, VA.
- Laugen, B.T., Acur, N., Boer, H., & Fick, J. (2005). Best manufacturing practices—What do the best-performing companies do? *International Journal of Operations and Production Management*, 25(2), 131-150.
- Magnaye, R., Sauser, B., & Ramirez-Marquez, J. (2009). System development planning using readiness levels in a cost of development minimization model. *Systems Engineering*, under review.
- Mankins, J.C. (1995). *Technology readiness levels: A white paper*. Washington, DC: NASA.
- Mankins, J.C. (2002). Approaches to strategic research and technology (R&T) analysis and road mapping. *Acta Astronautica*, 51, 3-21.
- Martinsuo, M., & Lehtonen, P. (2007). Role of single-project management in achieving portfolio management efficiency. *International Journal of Project Management*, 25, 56-65.
- Michaud, K., Forbes, E. Sauser, B., & Gentile, P. (2008, October 22). *Evaluating complex system development maturity—The creation and implementation of a system readiness level for defense acquisition programs*. 11<sup>th</sup> NDIA Systems Engineering Conference, San Diego, CA.
- Ramirez-Marquez, J., & Rocco, C. (2007). *Probabilistic knowledge discovery algorithm in network reliability optimization*. ESREL Annual Conference, Stavanger, Norway.
- Ramirez-Marquez, J., & C. Rocco (2008). All-terminal network reliability optimization via probabilistic solution discovery. *Reliability Engineering and System Safety*, in press.
- De Reyck, B., et al. (2005). The impact of project portfolio management on information technology projects. *International Journal of Project Management*, 23, 524-537.
- Sauser, B., Verma, D., Ramirez-Marquez, J., & Gove, R. (2006). *From TRL to SRL: The concept of systems readiness levels*. Conference on Systems Engineering Research, Los Angeles, CA.
- Sauser, B., Magnaye, R., Ramirez-Marquez, J., & Tan, W. (2008a). A systems approach to expanding the technology readiness level within defense acquisition. *International Journal of Defense Acquisition Management*, 1, 39-58.
- Sauser, B., Magnaye, R., Ramirez-Marquez, J., & Tan, W. (2008b). System maturity indices for decision support in the defense acquisition process. In *Proceedings of the Fifth Annual Acquisition Research Symposium*. Monterey, CA: Naval Postgraduate School.
- Sauser, B., & Ramirez-Marquez, J. (2009). System development planning via system maturity optimization. *IEEE Transactions on Engineering Management*, (accepted).



## 2003 - 2009 Sponsored Research Topics

### **Acquisition Management**

- Acquiring Combat Capability via Public-Private Partnerships (PPPs)
- BCA: Contractor vs. Organic Growth
- Defense Industry Consolidation
- EU-US Defense Industrial Relationships
- Knowledge Value Added (KVA) + Real Options (RO) Applied to Shipyard Planning Processes
- Managing Services Supply Chain
- MOSA Contracting Implications
- Portfolio Optimization via KVA + RO
- Private Military Sector
- Software Requirements for OA
- Spiral Development
- Strategy for Defense Acquisition Research
- The Software, Hardware Asset Reuse Enterprise (SHARE) repository

### **Contract Management**

- Commodity Sourcing Strategies
- Contracting Government Procurement Functions
- Contractors in 21st Century Combat Zone
- Joint Contingency Contracting
- Model for Optimizing Contingency Contracting Planning and Execution
- Navy Contract Writing Guide
- Past Performance in Source Selection
- Strategic Contingency Contracting
- Transforming DoD Contract Closeout
- USAF Energy Savings Performance Contracts
- USAF IT Commodity Council
- USMC Contingency Contracting

### **Financial Management**

- Acquisitions via leasing: MPS case
- Budget Scoring
- Budgeting for Capabilities-based Planning
- Capital Budgeting for DoD





- Energy Saving Contracts/DoD Mobile Assets
- Financing DoD Budget via PPPs
- Lessons from Private Sector Capital Budgeting for DoD Acquisition Budgeting Reform
- PPPs and Government Financing
- ROI of Information Warfare Systems
- Special Termination Liability in MDAPs
- Strategic Sourcing
- Transaction Cost Economics (TCE) to Improve Cost Estimates

### **Human Resources**

- Indefinite Reenlistment
- Individual Augmentation
- Learning Management Systems
- Moral Conduct Waivers and First-term Attrition
- Retention
- The Navy's Selective Reenlistment Bonus (SRB) Management System
- Tuition Assistance

### **Logistics Management**

- Analysis of LAV Depot Maintenance
- Army LOG MOD
- ASDS Product Support Analysis
- Cold-chain Logistics
- Contractors Supporting Military Operations
- Diffusion/Variability on Vendor Performance Evaluation
- Evolutionary Acquisition
- Lean Six Sigma to Reduce Costs and Improve Readiness
- Naval Aviation Maintenance and Process Improvement (2)
- Optimizing CIWS Lifecycle Support (LCS)
- Outsourcing the Pearl Harbor MK-48 Intermediate Maintenance Activity
- Pallet Management System
- PBL (4)
- Privatization-NOSL/NAWCI
- RFID (6)
- Risk Analysis for Performance-based Logistics
- R-TOC Aegis Microwave Power Tubes



- Sense-and-Respond Logistics Network
- Strategic Sourcing

#### **Program Management**

- Building Collaborative Capacity
- Business Process Reengineering (BPR) for LCS Mission Module Acquisition
- Collaborative IT Tools Leveraging Competence
- Contractor vs. Organic Support
- Knowledge, Responsibilities and Decision Rights in MDAPs
- KVA Applied to Aegis and SSDS
- Managing the Service Supply Chain
- Measuring Uncertainty in Earned Value
- Organizational Modeling and Simulation
- Public-Private Partnership
- Terminating Your Own Program
- Utilizing Collaborative and Three-dimensional Imaging Technology

A complete listing and electronic copies of published research are available on our website:

[www.acquisitionresearch.org](http://www.acquisitionresearch.org)



THIS PAGE INTENTIONALLY LEFT BLANK





ACQUISITION RESEARCH PROGRAM  
GRADUATE SCHOOL OF BUSINESS & PUBLIC POLICY  
NAVAL POSTGRADUATE SCHOOL  
555 DYER ROAD, INGERSOLL HALL  
MONTEREY, CALIFORNIA 93943

[www.acquisitionresearch.org](http://www.acquisitionresearch.org)



SYSTEMS

Development &  
Maturity Laboratory

# Using a System Maturity Scale to Monitor and Evaluate the Development of Systems

Brian J. Sauser, Ph.D.

Jose E. Ramirez-Marquez, Ph.D.

Romulo B. Magnaye, Ph.D.  
candidate

# TRL Shortcomings

- Application of TRL to systems of technologies is not sufficient to give a holistic picture of complex system of systems readiness
  - TRL is only a measure of an individual technology
- Assessments of several technologies rapidly becomes very complex without a systematic method of comparison
- Multiple TRLs do not provide insight into integrations between technologies nor the maturity of the resulting system
  - Yet most complex systems fail at the integration points

## But, what's missing...

- “Readiness” values tend to be *soft metrics*<sup>1</sup> that are:
  - Relatively easy to derive, but require a complementing rational that explains the assessment,
  - Human-intensive,
  - Subjective,
  - Contain inherent variations or ambiguity that is averaged away.

<sup>1</sup>Dowling, T. & Pardoe, T. (2005) 'TIMPA - Technology Insertion Metrics Volume 1', Ministry of Defence, United Kingdom, QinetiQ.

# Integration Readiness Level


IRL	Definition
9	Integration is <b>Mission Proven</b> through successful mission operations.
8	Actual integration completed and <b>Mission Qualified</b> through test and demonstration, in the system environment.
7	The integration of technologies has been <b>Verified and Validated</b> with sufficient detail to be actionable.
6	The integrating technologies can <b>Accept, Translate, and Structure Information</b> for its intended application.
5	There is sufficient <b>Control</b> between technologies necessary to establish, manage, and terminate the integration.
4	There is sufficient detail in the <b>Quality and Assurance</b> of the integration between technologies.
3	There is <b>Compatibility</b> (i.e. common language) between technologies to orderly and efficiently integrate and interact.
2	There is some level of specificity to characterize the <b>Interaction</b> (i.e. ability to influence) between technologies through their interface.
1	An <b>Interface</b> between technologies has been identified with sufficient detail to allow characterization of the relationship.



# What we are doing?

Development of metrics, tool, and methodologies for determining a systems readiness level (SRL) and potential for making efficient and effective life-cycle acquisition and operational decisions. The SRL Model is a function of the individual Technology Readiness Levels (TRL) and their subsequent integration points with other technologies, the Integration Readiness Level (IRL).

## *The System*

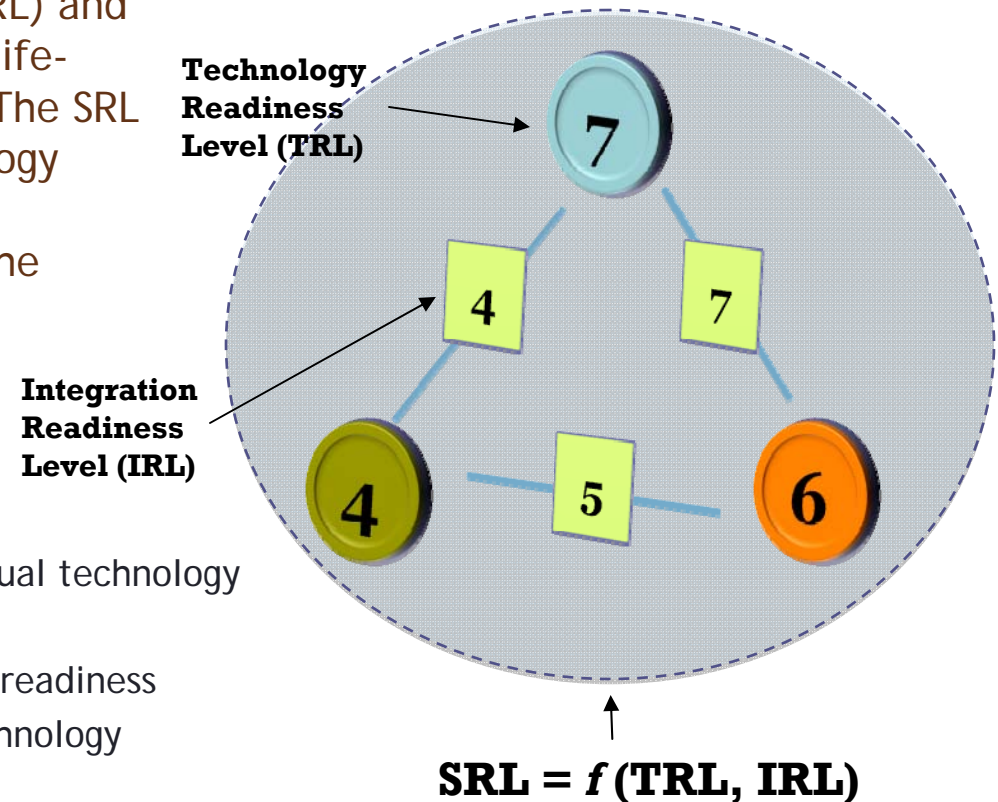

### ■ Value Proposition:

- Currently TRL is only a measure of an individual technology
- There is no method for integrating TRLs
- There is no systematic measure of a systems readiness
- Cost and schedule reduction in strategic technology development planning

■ **Deliverable:** Integration of methodologies for strategic roadmap planning that illustrate the timely implementation of capability increments.

# SRL Calculation

- The SRL is not user defined, but is instead based on the outcomes of the documented TRL and IRL evaluations
- Through mathematically combining these two separate readiness levels, a better picture of overall complex system readiness is obtained by examining all technologies in concert with all of their required integrations

$$\mathbf{SRL} = \mathbf{IRL} \times \mathbf{TRL}$$

$$\begin{bmatrix} \mathbf{SRL}_1 & \mathbf{SRL}_2 & \mathbf{SRL}_3 \end{bmatrix} = \begin{bmatrix} \mathbf{IRL}_{11} & \mathbf{IRL}_{12} & \mathbf{IRL}_{13} \\ \mathbf{IRL}_{12} & \mathbf{IRL}_{22} & \mathbf{IRL}_{23} \\ \mathbf{IRL}_{13} & \mathbf{IRL}_{23} & \mathbf{IRL}_{33} \end{bmatrix} \times \begin{bmatrix} \mathbf{TRL}_1 \\ \mathbf{TRL}_2 \\ \mathbf{TRL}_3 \end{bmatrix}$$

$$\begin{aligned} \text{Composite SRL} &= 1/n \left[ \mathbf{SRL}_1/n + \mathbf{SRL}_2/n + \mathbf{SRL}_3/n \right] \\ &= 1/n^2 \left[ \mathbf{SRL}_1 + \mathbf{SRL}_2 + \mathbf{SRL}_3 \right] \end{aligned}$$

- These values serve as a decision-making tool as they provide a prioritization guide of the system's technologies and integrations and point out deficiencies in the maturation process


# Key Assumptions and Limitations

- Ordinal data is given numeric value in order to assess overall progression or performance.
  - Grade Point Average (GPA), Failure Modes and Effects Analysis (FMEA)
- One system cannot be compared to the SRL of another system unless they are the same system.
  - You cannot compare a student with a 3.2 GPA in physics with a student that has a 3.8 GPA in biology. These students belong to different systems of education, but they are evaluated with the same system of metrics.
- Analysis is limited by the experience of previous assessments and experience of the assessors


# Key Assumptions and Limitations

- Analysis may result in rank reversals, where a less mature SRL receives a higher rating than a more mature SRL.
  - The reason for this is that the rankings are ordinal scale numbers, and multiplication is not a valid operation on them. The ordinal rankings only say that one ranking is better or worse than another, but not by how much.
- If used as a top-down tool, SRL may only identify major maturity deficiencies in a system.
  - When used as a "bottom-up" tool SRL can augment or complement other (systems) engineering management activities and identify many more maturity deficiencies resulting in top-level symptoms.


# What it can tell us?

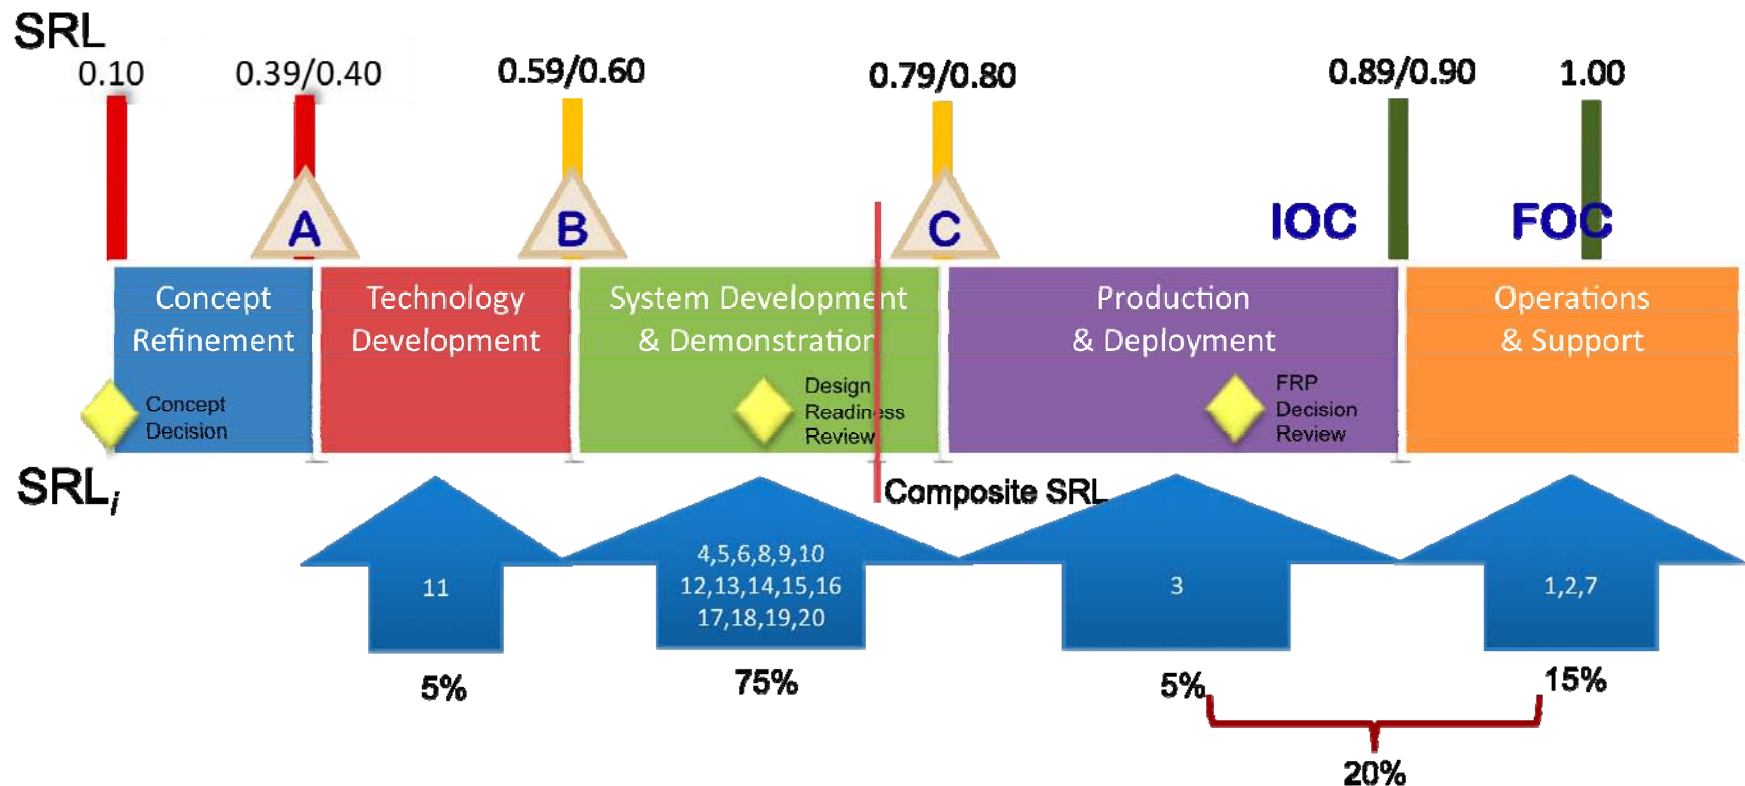

## Systems Earned Readiness Management

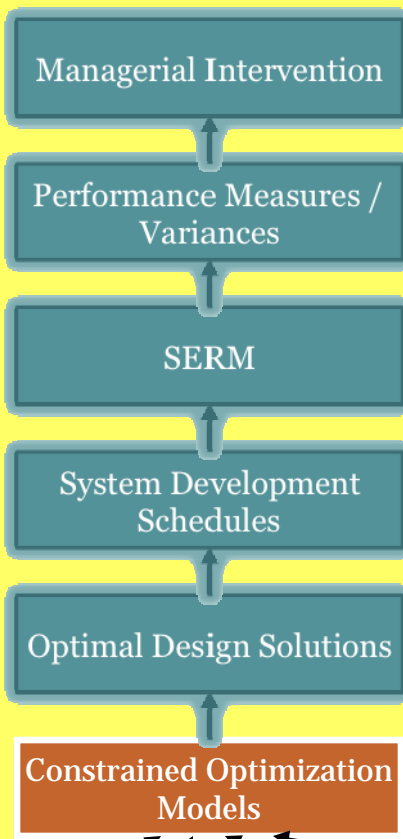

## Systems Readiness Level

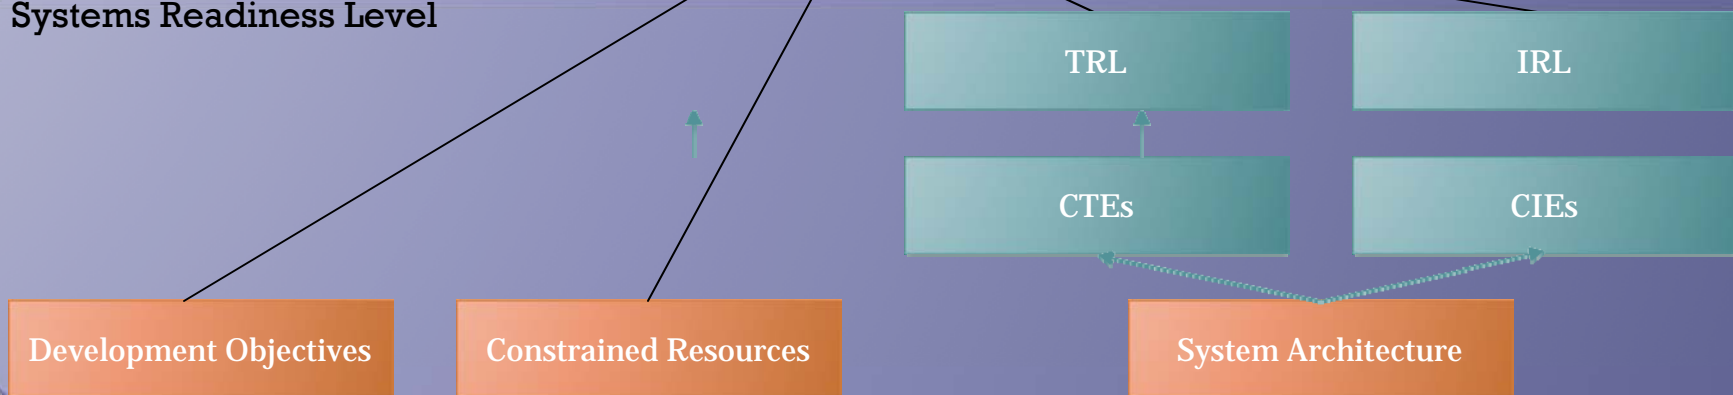

# Resource Optimization Models and System Earned Readiness Management (SERM)

# Generic Development Strategies:

- Optimize development cost — SCODmin Model
  - Magnaye, R., B. Sauser, J. Ramirez-Marquez, and W. Tan. (2008). "System Development Planning Using Readiness Levels in a Cost of Development Minimization Model." *Systems Engineering*.
- Optimize SRL (first-to-deploy) — SRLmax Model
  - Sauser, B.J. and J.E. Ramirez-Marquez. (2009). "System Development Planning via System Maturity Optimization." *IEEE Transactions on Engineering Management*. (in press; available at <http://ieeexplore.ieee.org>)
- Optimize system performance parameters

# Other Development Strategies:

- Optimize system value
- Multi-objective optimization



# SRL Resource Optimization

**Model  $SRL_{max}$**  = an optimization model with the objective to maximize the SRL (a function of TRL and IRL) under constraints associated with resources.

Year	Target SRL	TRL						IRL						
		1	2	3	4	5	6	1,2	1,3	2,3	2,4	3,5	4,5	5,6
6	1.000	9	9	9	9	9	9	9	9	9	9	9	9	9
5	0.896	9	9	9	8	9	9	9	9	9	8	8	5	7
4	0.792	8	9	9	6	9	9	9	9	9	5	8	4	6
3	0.688	8	8	9	6	9	9	8	8	7	5	7	2	4
2	0.584	8	8	8	6	7	6	7	7	7	5	6	2	4
1	0.480	8	8	7	6	6	6	5	6	6	5	6	2	2

# SRL Resource Optimization


**Model SCOD<sub>min</sub>** = an optimization model whose objective is to minimize development cost (a function of TRL and IRL development) under constraints associated with schedule and the required SRL value.

Model	SRL	TRL						IRL						
		1	2	3	4	5	6	1,2	1,3	2,3	2,4	3,5	4,5	5,6
SCOD <sub>min</sub>	0.69	8	8	9	6	9	9	8	8	7	5	7	2	4
SRL <sub>max</sub>	0.73	8	9	9	6	9	9	8	8	8	5	7	2	5

# Systems Earned Readiness Management

## Earned value analysis

- Is a performance monitoring tool
- Provides a measure of performance that is:
  - Realistic?
  - Based on actual data?
- Provides answers to these questions:
  - What WORK is scheduled to have been completed?
  - What was the cost estimate for the WORK scheduled?
  - What WORK has been accomplished?
  - What was the cost estimated of the completed WORK?
  - What have our actual costs been?
  - What are the variances?

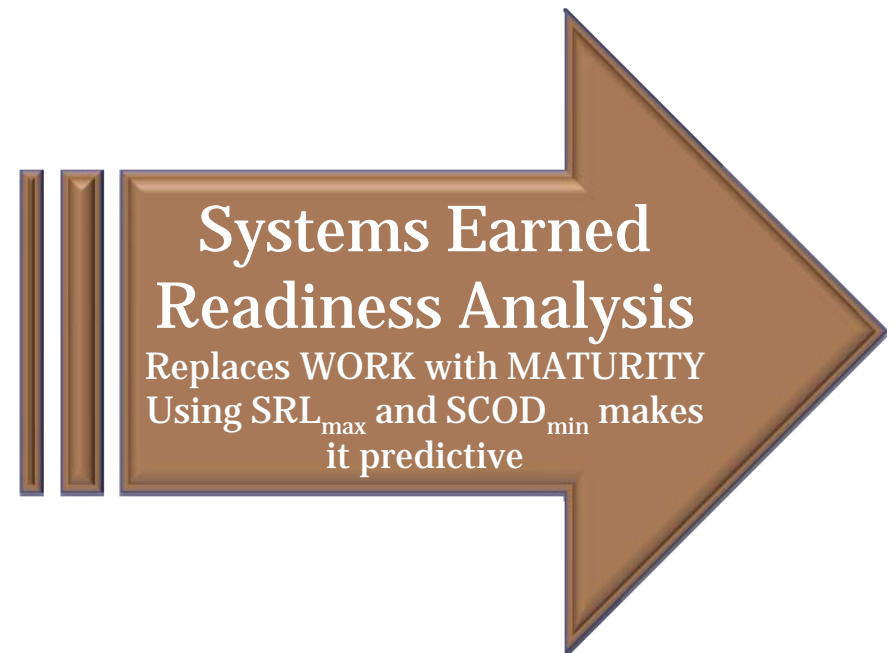

# Model Based Systems Engineering

- Utilizing Model Based Systems Engineering (MBSE):
  - Setup an environment to model the current SRL approach;
  - Review other 'metrics' needed to be included and determine their relationships to TRL, IRL, and the System Architecture;
  - Provide a process for determining SRL within MBSE.
  - Determine a set of 'views' or diagrams on the model creation which enables a way to communicate (e.g. a System Maturity Diagram)
  - MBSE allows for the functional decomposition of models which would allow for a recursive SRL assessment whereby an SRL at one level transforms to a TRL at another.



Visit us at <http://www.SystemReadinessLevel.com>


systemreadinesslevel.com

<http://systemreadinesslevel.com/> Google

RA 09-14 - S...logy Office A Periodic T...ion Methods Lodging: DH...ork Summit Getting Your... Bestseller

WELCOME PUBLICATIONS RESEARCH CALCULATOR LEARN MORE SMA ROUNDTABLE

## MOVING BEYOND TRL...



### SYSTEMS Development & Maturity Laboratory

**WHAT WILL YOU FIND HERE...**

The Technology Readiness Level (TRL) scale is a measure of maturity of an individual technology, with a view towards operational use in a system context. A comprehensive set of concerns becomes relevant when this metric is abstracted from an individual technology to a system context, which may involve interplay among multiple technologies that are integrated through the acquisition life cycle. This research has been pursuing the development of a system-focused approach for managing system development and making effective and efficient decisions during the acquisition life cycle. For this to be accomplished our research has been evolving in a series phases:

**Phase 1 (10/06 - 09/07):** Development of system maturity indices such as a System Readiness Level (SRL) and Integration Readiness Level (IRL) which work with TRL in order to assess developmental maturity during the acquisition life cycle;


**Phase 2 (08/07 - 12/07):** Validation and calibration of the systems maturity indices to the acquisition life cycle;

**Phase 3 (12/07 - present):** Building on the foundation of the SRL and providing techniques for determining current and future readiness of a system to determine its position in the acquisition life cycle.

We are now expanding Phase 3 into a program of research to explore the optimization of the SRL index based on constrained resources to provide a decision support approach to enhance managerial capabilities and create a systems life cycle maturity management approach, which we define as **System Earned Readiness Management (SERM)**. Alternatively to Earned Value Management (EVM), SERM addresses the earned readiness or maturity of systems development as it equates to the acquisition life cycle.

*There is a need for "...research in developing more formal metrics and models for determining systems engineering effectiveness for enabling continuous improvement."*


- Kelly Miller, Chief Systems Engineer, NSA at the 2005 Conference on Systems Engineering Research

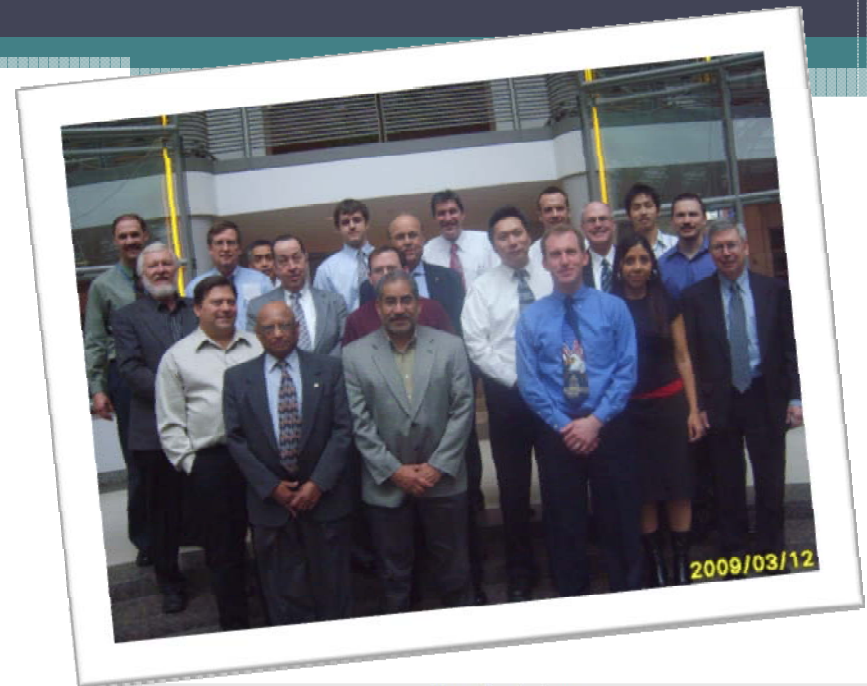

systemreadinesslevel.com

<http://systemreadinesslevel.com/> Google

RA 09-14 - S...logy Office A Periodic T...ion Methods Lodging: DH...ork Summit Getting Your... Bestseller



## LEADING INDICATORS IN SYSTEM MATURITY

Beyond Technology Readiness Level...

**March 12, 2009 Washington, DC**

**TOPICS RELATED TO SYSTEM MATURITY ASSESSMENT**

**LIFECYCLE FORECAST & PLANNING**  
The ability to consider additional maturity metrics and obsolescence through comparative analysis of multiple technologies in trade studies, spiral development, or evolutionary acquisition.

**SYSTEMS ARCHITECTURE**  
The ability to collectively evaluate component integration and system readiness to reduce developmental risks as it relates to a systems architecture.

**POLICY AND DIRECTIVES**  
Dynamic systems assessment platforms with a set of rules, guidelines, and ontology for consistency, repeatability and traceability during

**FOCUS**

The Technology Readiness Level (TRL) scale is a measure of maturity of an individual technology, with a view towards operational use in a system context. A comprehensive set of concerns becomes relevant when this metric is abstracted from an individual technology to a system context, which may involve interplay among multiple technologies that are integrated through a developmental life cycle. This research symposium is **focused on innovations in system maturity indices for the development of a system-focused approach for managing system development and making effective and efficient decisions.**

**PURPOSE**

The purpose of this roundtable is to provide system designers and developers, program and project managers, and researchers a platform to discuss and disseminate emerging knowledge in systems maturity indices (beyond TRL). The objective is to **create a community of practitioners and researchers focused on new knowledge in system maturity indices and assessment.**

**FORMAT**

For the first half of day one, Presentation Sessions will run in succession and comprise presentations from Stakeholders on the emerging challenges and potential solutions in systems maturity indices and assessment. The sessions will be run in a panel/discussion format to assure all attendees are engaged in the **knowledge exploration**. For the second half of day one, breakout groups will be asked to address these three questions with respects to the future of systems maturity assessment:

1. What are the real questions?
2. What do we know?
3. What do we need to know?

# SMA Roundtable - Preliminary Results

- What are the real questions?
  - What is SRL useful for? To ensure stakeholders and users that the program is progressing satisfactorily.
  - Are existing metrics adequate to define SRL?
  - What has changed that makes SRL necessary?  
Hardware and software complexity have increased by several orders of magnitude, more complex interfaces, & systems are no longer stovepiped.
  - How broadly can the SRL be applied. Is it flexible and scalable to SoS, software, integration?

# SMA Roundtable - Preliminary Results

- What do we know?
  - We have TRL
  - Systems are complex
  - Some alternatives exist
  - Interfaces are difficult
  - Technologies are changing rapidly (Moore's law)
  - Assessment taxonomies vary
  - Management likes single numbers
  - Requirements creep impacts schedule performance

# SMA Roundtable - Preliminary Results

- What do we need to know?
  - We need better data for acquisition decisions
  - We need better fidelity tools to aid in making decisions (integrated tool set to handle metrics, portfolios, enterprises)
  - We need to know how to validate the SRL assessment criteria against actual performance. Are there any success / failure stories (case studies)?



# SMA Roundtable - Preliminary Results

- What could we do to learn that?
  - Look for case studies for successes/failures and identify the data that warns of program failure.
  - Perform a tool gap analysis
  - Survey stakeholders/users to determine what criteria they feel indicates maturity
  - Conduct a pilot program to validate SRL
  - New issues are emerging and need to be addressed
    - System assurance
    - Trusted sources
    - Information assurance
    - Industrial base adequacy



**SYSTEMS**  
Development &  
Maturity Laboratory



Thanks to...

Office of Naval Research  
Naval Postgraduate School